
Connectors, Straight with Metric male thread (EN 60423)

Using material of high quality

IP67 TNC



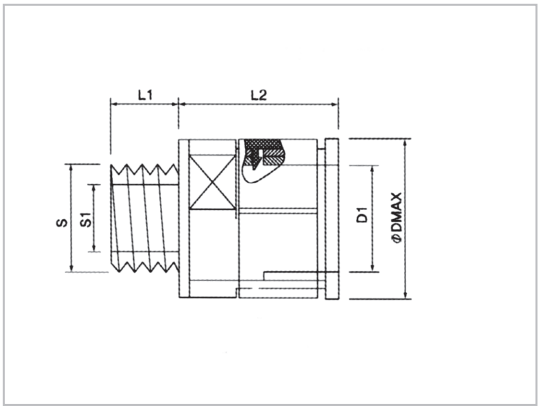

- **Material:** High Quality Polyamide6
- **Protective:** IP 67 (EN 60529)
- **Temperature Range:** −40°C to + 105°C
- **Short Term:** up to +150°C
- **Self-Extinguishing:** UL94−HB, UL94−Vo
  Free of Halogen Phosphorous and cadmium
- **Color:** Black & Gray
- **Application:** Machine tool, Shipbuilding, Tramway Industrial/ Automatic Machinery Printing Machine etc.
  Joint box with connector
- **Certification:**

- **재 질:** 고품질 폴리아미드6
- **방 수 등 급:** IP 67 (EN 60529)
- **적용온도범위:** −40°C + 105°C
- **순간최대온도:** +150°C
- **자 기 소 화 성:** UL94−HB, UL94−Vo
  Free of Halogen Phosphorous and cadmium
- **색 상:** 검정색, 회색
- **적 용:** 공작기계, 산업기계, 자동화기계 조선소, 전동차 등 컨트롤박스에 결합하기 위한 장소에 사용됨.
- **국 제 인 증:**

M Thread (EN60423)

품 번(Order No.)		나사규격 (Thread) Metric	치수(Dimensions in mm)						적용전선관 (for tube size)
Black	Gray		L_1	L_2	D	D_1	S_1	S	
TNC-M107B	TNC-M107G	M12×1.5	11	22	15.3	10.5	8.7	12	7
TNC-M127B	TNC-M127G	M16×1.5	11	22	15.3	10.5	12.6	16	7
TNC-M167B	TNC-M167G	M20×1.5	11	22	15.3	10.5	17.3	20	7
TNC-M10B	TNC-M10G	M12×1.5	13	27	23	13	8.7	12	10
TNC-M120B	TNC-M120G	M16×1.5	13	27	23	13	12.6	16	10
TNC-M20B	TNC-M20G	M20×1.5	13	27	23	13	15.2	20	10
TNC-M102B	TNC-M102G	M12×1.5	13	27	25	17	8.7	12	12
TNC-M12B	TNC-M12G	M16×1.5	13	27	25	17	12.6	16	12
TNC-M202B	TNC-M202G	M20×1.5	13	27	25	17	15.2	20	12
TNC-M126B	TNC-M126G	M16×1.5	13	28	30	22	12.6	16	16
TNC-M16B	TNC-M16G	M20×1.5	13	28	30	22	15.2	20	16
TNC-M226B	TNC-M226G	M25×1.5	13	28	30	22	19.4	25	16
TNC-M22B	TNC-M22G	M25×1.5	15	34	41	30	19.4	25	22
TNC-M3222B	TNC-M3222G	M32×1.5	15	34	41	30	27	32	22
TNC-M28B	TNC-M28G	M32×1.5	15	38	47	36	26.2	32	28
TNC-M4028B	TNC-M4028G	M40×1.5	15	38	47	36	34	40	28
TNC-M36B	TNC-M36G	M40×1.5	19	46	56	44	34.5	40	36
TNC-M5036B	TNC-M5036G	M50×1.5	19	46	56	44	44	50	36
TNC-M48B	TNC-M48G	M50×1.5	21	51	68	55	44	50	48
TNC-M6348B	TNC-M6348G	M63×1.5	21	51	68	55	56.7	63	48