
Connectors, 90° Curved Elbow with Metric male thread (EN 60423)

TWC IP67

Using material of high quality



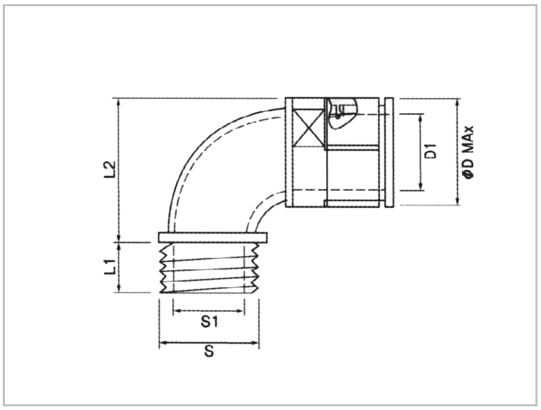

- Material: High Quality Polyamide6
- Protective: IP 67 (EN 60529)
- Temperature Range: −40°C to + 105°C
- Short Term: up to +150°C
- Self-Extinguishing: UL94-HB, UL94-Vo
  Free of Halogen Phosphorous and cadmium
- Color: Black & Gray
- Application: Machine tool, Shipbuilding, Tramway Industrial/ Automatic Machinery Printing Machine etc.
  Joint box with connector
- Certification:

- 재 질: 고품질 폴리아미드6
- 방 수 등 급: IP 67 (EN 60529)
- 적용온도범위: −40°C + 105°C
- 순간최대온도: +150°C
- 자 기 소 화 성: UL94-HB, UL94-Vo
  Free of Halogen Phosphorous and cadmium
- 색 상: 검정색, 회색
- 적 용: 공작기계, 산업기계, 자동화기계 조선소, 전동차 등 컨트롤박스에 결합하기 위한 장소에 사용됨.
- 국 제 인 증:

M Thread (EN 60423)

품 번(Order No.)		나사규격 (Thread) Metric	치수(Dimensions in mm)						적용전선관 (for tube size)
Black	Gray		L_1	L_2	D	D_1	S_1	S	
TWC-M107B	TWC-M107G	M12×1.5	11	20	15.3	10.5	9.3	12	7
TWC-M10B	TWC-M10G	M12×1.5	13	38	23	13	7 7	12	10
TWC-M12B	TWC-M12G	M16×1.5	13	38	25	17	12	16	12
TWC-M16B	TWC-M16G	M20×1.5	13	46	30	22	15.2	20	16
TWC-M22B	TWC-M22G	M25×1.5	15	52	41	30	19.4	25	22
TWC-M28B	TWC-M28G	M32×1.5	15	60	47	36	26.2	32	28
TWC-M36B	TWC-M36G	M40×1.5	19	76	56	44	34.5	40	36
TWC-M48B	TWC-M48G	M50×1.5	19	91	68	55	44	50	48