
Cable Gland, Straight with Metric thread

Using material of high quality

FCG IP68



- Material: High Quality Polyamide6
- Protective: IP 68 (EN 60529)
- Temperature Range: −40°C to + 105°C
- Short Term: up to +150°C
- Self-Extinguishing: UL94-HB, UL94-Vo
  Free of Halogen Phosphorous and cadmium
- Color: Black & Gray
- Application: Connector for control box radio box or cables from electric machine. water & dust, oil proof halogen free.

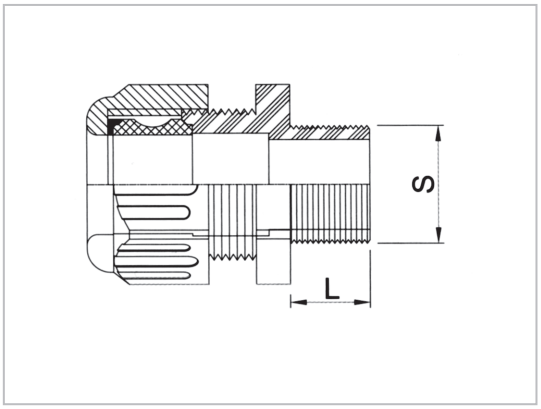

- 재 질: 고품질 폴리아미드6
- 방 수 등 급: IP 68(EN 60529)
- 적용온도범위: −40°C + 105°C
- 순간최대온도: +150°C
- 자 기 소 화 성: UL94-HB, UL94-Vo
  Free of Halogen Phosphorous and cadmium
- 색 상: 검정색, 회색
- 적 용: 분전함, 제어함, 통신함 또는 각종 전기 기기로 부터 케이블을 인출할때 사용하는 커넥터 방수, 방진, 방유구조가 확실하고 내절연, 내충격 및 난연성이 뛰어난 커넥터.

M Thread (EN 60423)

품 번(Order No.)		나사규격 (Thread) PF	Cable Dia/mm		L (mm)	S (mm)
Black	Gray		Min	Max		
FCG-M10B	FCG-M10G	M12×1.5	3.5	6.5	15	12
FCG-M120B	FCG-M120G	M16×1.5	3.5	6.5	15	16
FCG-M102B	FCG-M102G	M12×1.5	4	7 1	15	12
FCG-M12B	FCG-M12G	M16×1.5	4	8	15	16
FCG-M162B	FCG-M162G	M20×1.5	4	8	15	20
FCG-M126B	FCG-M126G	M16×1.5	7	10.9	15	16
FCG-M16B	FCG-M16G	M20×1.5	7	12.3	15	20
FCG-M1622B	FCG-M1622G	M20×1.5	12	14.5	15	20
FCG-M22B	FCG-M22G	M25×1.5	12	18	15	25
FCG-M228B	FCG-M228G	M25×1.5	18	19.5	15	25
FCG-M28B	FCG-M28G	M32×1.5	18	26	15	32
FCG-M36B	FCG-M36G	M40×1.5	22	33	19	40
FCG-M48B	FCG-M48G	M50×1.5	36	42	19	50