PES conduit is suitable for chemical machines, due to the excellent resistance to acid and alkali.

PES CORRUGATED TUBE



- Material: Soft Polyethylene(PE)
- Construction: Inside & Outside Corrugated all Plastic Hose
- Protective: IP 68
- Temperature Range: −15°C to + 60°C
- Short Term: up to +80°C
- Color: Black & Gray
- Connections: CPSFIX
- Resistant to: Acid, Alkali
- Application: Machine tool, Industrial Machinery Chemical Machinery etc.

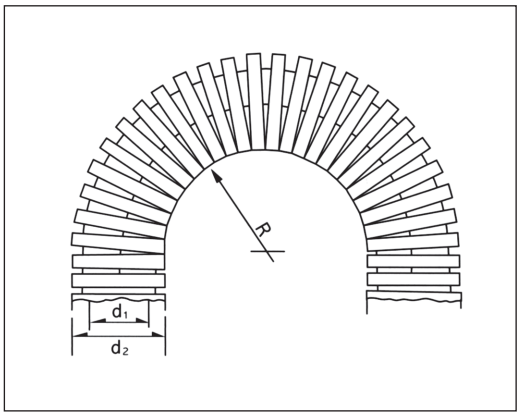

- 재 질: 폴리에틸렌(PE)
- 구 조: 내/외부 굴곡플라스틱 호스
- 방 수 등 급: IP 68
- 적용온도범위: −15°C + 60°C
- 순간최대온도: +80°C
- 색 상: 검정색, 회색
- 사 용 커 넥 터: CPSFIX
- 적 용: 공작기계, 산업기계 화학기계(내산성, 내알카리성) 등.

Dimensions in mm

품 번 Order No.		최소내경 Inner Diameter (d1)	외 경 Outer Diameter (d2)	최소곡률반경 Bending Radius (R)mm±10%	포장단위 Packing meter/roll
Black	Gray				
PES-07B	PES-07G	6.4	10	15	50/100
PES-10B	PES-10G	9.6	13	20	50
PES-12B	PES-12G	11.8	15.8	30	50
PES-16B	PES-16G	15.9	21.2	40	50
PES-22B	PES-22G	21.7	28.5	45	50
PES-28B	PES-28G	27.8	34.5	55	50
PES-36B	PES-36G	36	42.5	60	30
PES-48B	PES-48G	46.5	54.5	70	30
PES-56B	PES-56G	56.3	67.2	110	30
PES-70B	PES-70G	70	82.5	160	10
PES-95B	PES-95G	91.5	106	210	10